


MBTF22 – 2,5xD

Verktyg för fräsning i Stål/Rostfritt/Gjutjärn/Titan/Ni-Co legeringar



- 3-skärig
- Användbar skärlängd 2,5xD
- Belagd
- Allmän fräsning
- Variabel spånkanal

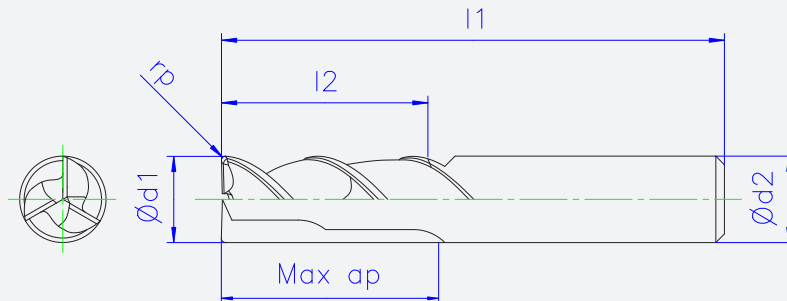

MBTF22 | HYPERLOX | Ø2,0-20,0

Art.nr	Ød1e8	Ød2h6	l1	l2	Max ap	rp	z	Info
• MBTF22020004	2,0	4,0	50,0	8,0	8,0	0,04	3	Cyl
• MBTF22030006	3,0	4,0	50,0	11,0	11,0	0,06	3	Cyl
• MBTF22040008	4,0	6,0	50,0	12,0	12,0	0,08	3	Cyl
• MBTF22050010	5,0	6,0	50,0	15,0	15,0	0,10	3	Cyl
• MBTF22060012	6,0	6,0	50,0	18,0	18,0	0,12	3	Cyl
• MBTF22080016	8,0	8,0	63,0	23,0	23,0	0,16	3	Cyl
◦ MBTF22080016W	8,0	8,0	63,0	23,0	23,0	0,16	3	Wel
• MBTF22100020	10,0	10,0	72,0	26,0	26,0	0,20	3	Cyl
◦ MBTF22100020W	10,0	10,0	72,0	26,0	26,0	0,20	3	Wel
• MBTF22120024	12,0	12,0	83,0	32,0	32,0	0,24	3	Cyl
◦ MBTF22120024W	12,0	12,0	83,0	32,0	32,0	0,24	3	Wel
• MBTF22140028	14,0	14,0	92,0	37,0	37,0	0,28	3	Cyl
• MBTF22160032W	16,0	16,0	108,0	42,0	42,0	0,32	3	Wel
• MBTF22200040W	20,0	20,0	120,0	52,0	52,0	0,40	3	Wel

Info om skärdata, se sid 32.

• = Lagervara, ◦ = Leveranstid 1-2 arbetsdagar

◻ = Mellanliggande diameter eller hörnradie/fas tillverkas vid förfrågan.

