


MBTF35 – 4xD

Verktyg för fräsning i Stål/Rostfritt/Gjutjärn/Titan/Ni-Co legeringar

- 4-skärig
- Skärlängd 4xD
- Belagd
- Dynamisk fräsning
- Lättskärande geometri
- MBT Vibrationsdämpning
- Variabel spånkanal
- Slät/spåndelare

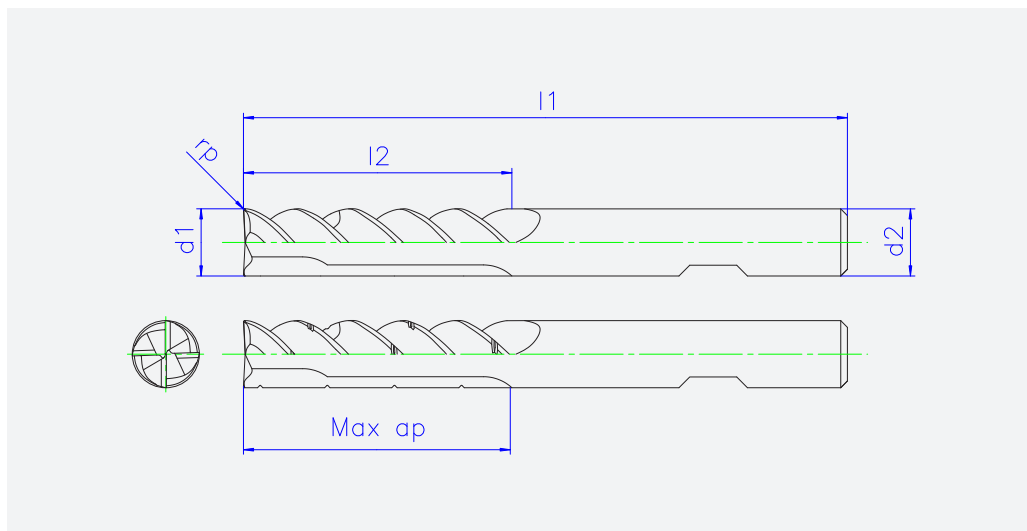

MBTF35 | ALSIDUR | Ø4,0-20,0 | SLÄT/SPÅNDELARE

Art.nr	Ød1e8	Ød2h6	l1	l2	Max ap	rp	z	Info
• MBTF35040008	4,0	6,0	50,0	16,0	15,5	0,08	4	
• MBTF35040008Q	4,0	6,0	50,0	16,0	15,5	0,08	4	Q*
• MBTF35050010	5,0	6,0	50,0	20,0	19,5	0,10	4	
• MBTF35050010Q	5,0	6,0	50,0	20,0	19,5	0,10	4	Q*
• MBTF35060012	6,0	6,0	65,0	24,0	23,25	0,12	4	
• MBTF35060012Q	6,0	6,0	65,0	24,0	23,25	0,12	4	Q*
• MBTF35080016	8,0	8,0	75,0	32,0	31,25	0,16	4	Cyl
• MBTF35080016W	8,0	8,0	75,0	32,0	31,25	0,16	4	Wel
• MBTF35080016QW	8,0	8,0	75,0	32,0	31,25	0,16	4	Wel/Q*
• MBTF35100020	10,0	10,0	85,0	40,0	39,0	0,20	4	Cyl
• MBTF35100020W	10,0	10,0	85,0	40,0	39,0	0,20	4	Wel
• MBTF35100020QW	10,0	10,0	85,0	40,0	39,0	0,20	4	Wel/Q*
• MBTF35120024	12,0	12,0	100,0	48,0	47,0	0,24	4	Cyl
• MBTF35120024W	12,0	12,0	100,0	48,0	47,0	0,24	4	Wel
• MBTF35120024QW	12,0	12,0	100,0	48,0	47,0	0,24	4	Wel/Q*
• MBTF35160032	16,0	16,0	120,0	64,0	62,0	0,32	4	Cyl
• MBTF35160032W	16,0	16,0	120,0	64,0	62,0	0,32	4	Wel
• MBTF35160032QW	16,0	16,0	120,0	64,0	62,0	0,32	4	Wel/Q*
• MBTF35200040W	20,0	20,0	142,0	80,0	78,0	0,40	4	Wel
• MBTF35200040QW	20,0	20,0	142,0	80,0	78,0	0,40	4	Wel/Q*

Info om skärdata, se sid 33.

*Q= Spåndelare

• = Lagervara, ○ = Leveranstid 1-2 arbetsdagar ▲ = New

□ = Mellanliggande diameter eller hörnradie/fas tillverkas vid förfrågan.

