


# MBTF54 – 2,0xD

Verktyg för fräsning i Rostfritt/Titan/Ni-Co legeringar



- 4-skärig
- Användbar skärlängd 2,0xD
- Belagd
- Allmän, dynamisk fräsning
- MBT Vibrationsdämpning
- Variabel spånkanal

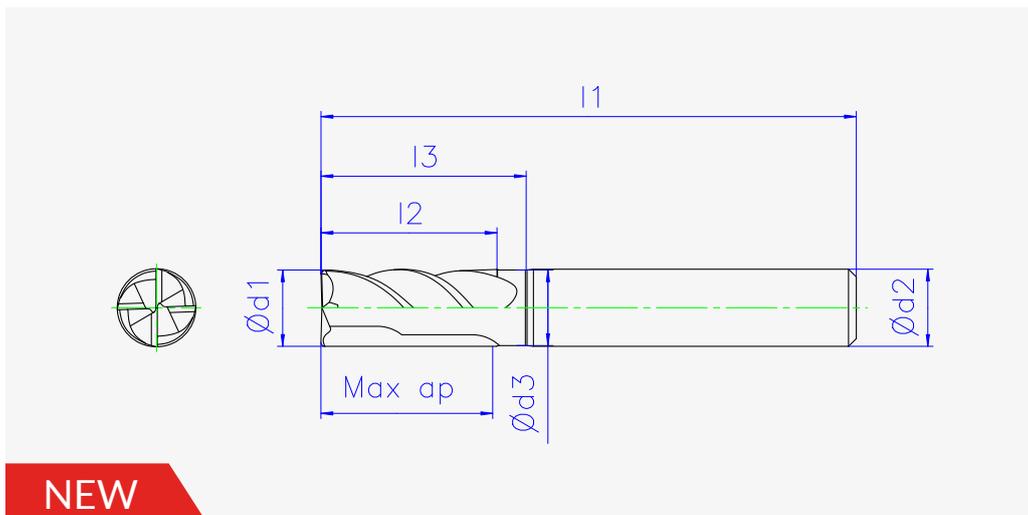

## MBTF54 | InoxaCon | Ø4,0-Ø12,0

Art.nr	Ød1e8	Ød2h6	l1	l2	l3	Max ap	rp	z	Info
• MBTF54020004	2,0	4,0	50,0	4,5	6,0	4,0	0,04	4	Cyl
• MBTF54030006	3,0	4,0	50,0	6,5	8,0	6,0	0,06	4	Cyl
• MBTF54040008	4,0	6,0	50,0	9,0	11,5	8,0	0,08	4	Cyl
• MBTF54050010	5,0	6,0	50,0	11,0	15,0	10,0	0,10	4	Cyl
• MBTF54060012	6,0	6,0	50,0	13,0	16,0	12,0	0,12	4	Cyl
• MBTF54080016	8,0	8,0	63,0	17,5	21,0	16,0	0,16	4	Cyl
• MBTF54100020	10,0	10,0	72,0	22,0	26,0	20,0	0,20	4	Cyl
• MBTF54120024	12,0	12,0	83,0	26,0	31,0	24,0	0,24	4	Cyl
• MBTF54160032	16,0	16,0	92	34,0	41,5	32,0	0,32	4	Cyl

Info om skärdata, se sid 37.

- = Lagervara, ◦ = Leveranstid 1-2 arbetsdagar
- ◻ = Mellanliggande diameter eller hörnradie/fas tillverkas vid förfrågan.

